
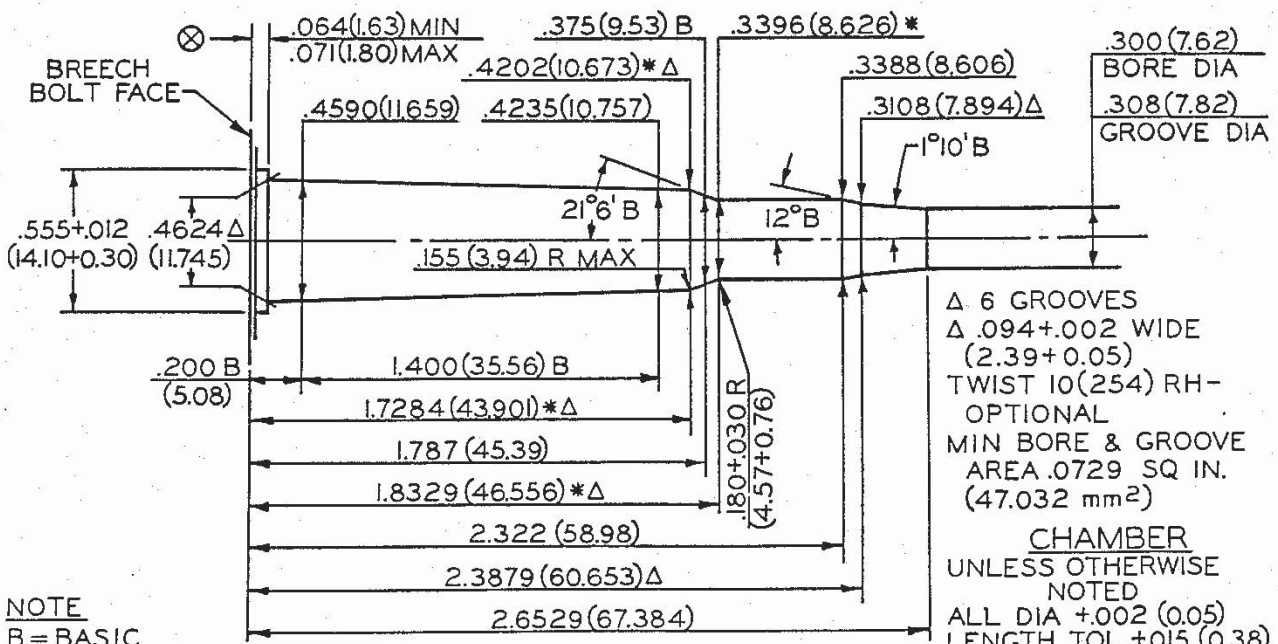


SECTION I - CHARACTERISTICS
 CENTERFIRE RIFLE
 SAAMI VOLUNTARY PERFORMANCE STANDARDS

CARTRIDGE & CHAMBER
 30-40 Krag

CARTRIDGE
 UNLESS OTHERWISE NOTED
 BODY DIA $-.008$ (0.20)

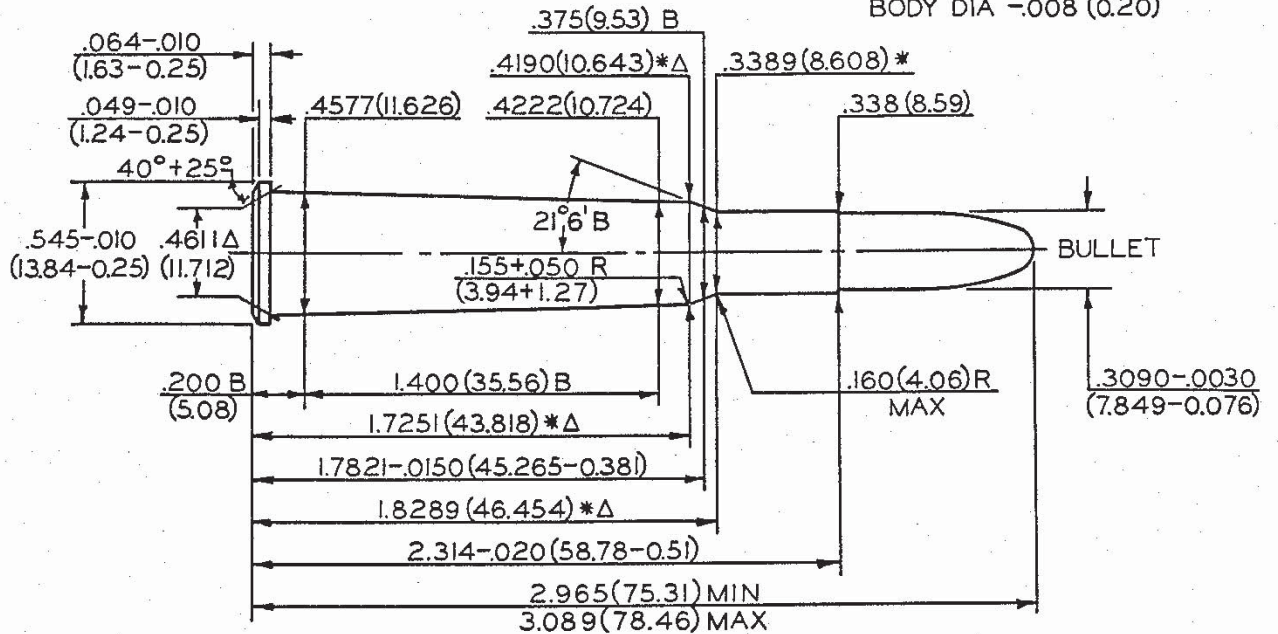

Δ 6 GROOVES
 Δ .094+0.002 WIDE
 (2.39+0.05)
 TWIST 10(254) RH-
 OPTIONAL
 MIN BORE & GROOVE
 AREA .0729 SQ IN.
 (47.032 mm²)
 CHAMBER
 UNLESS OTHERWISE
 NOTED
 ALL DIA +.002 (0.05)
 LENGTH TOL +.015 (0.38)

NOTE
 B = BASIC
 (XX.XX) = MILLIMETERS
 ⊗ = HEADSPACE DIMENSION

* DIMENSIONS ARE TO INTERSECTION OF LINES Δ = REFERENCE DIMENSION
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)